



per modelli  
**A80 - A90 - R90 - GF80 - GF90**

versione **sinistra** | versione **destra**  
per modelli **A 90x70 - A 100x70 - A 100x80 - 2P 120x80**




modello	A ± 5	B ± 5	C	D	E
<b>A80</b>	804	804	200	404	300
<b>A90</b>	904	904	200	504	300
<b>GF80</b>	804	804	200	404	300
<b>GF90</b>	904	904	200	504	300




modello	A ± 5	B ± 5	C	D	E
<b>R90</b>	904	904	200	504	300

### S INSTALLAZIONE A SINISTRA

### D INSTALLAZIONE A DESTRA

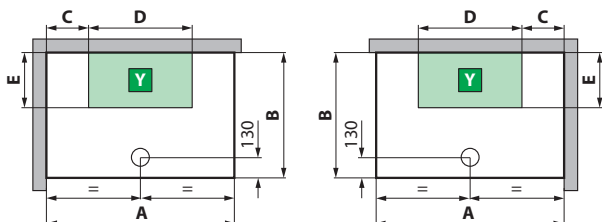

modello	A ± 5	B ± 5	C	D	E
<b>A90x70</b>	904	704	200	504	300
<b>A100x70</b>	1004	704	200	604	300
<b>A100x80</b>	1004	804	200	604	300
<b>2P120x80</b>	1204	804	200	804	300

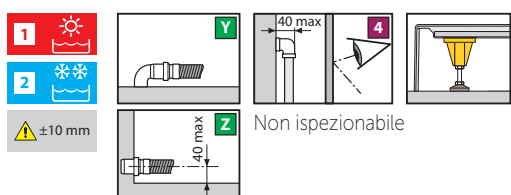

Non ispezionabile

### CARATTERISTICHE IDRAULICHE:

Pressione dinamica ottimale 2÷5 bar  
Acqua calda 1/2"  
Acqua fredda 1/2"  
Allaccio sifone con raccordo ø 40 mm